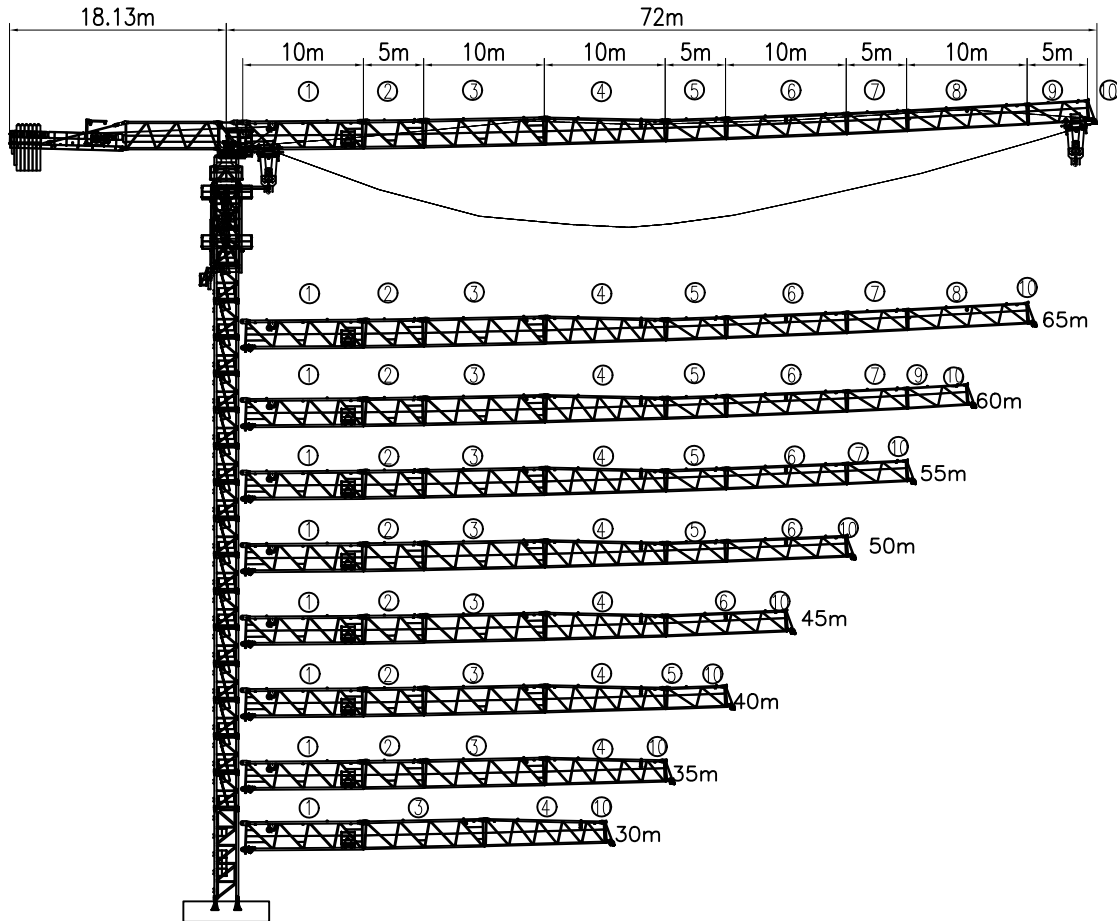
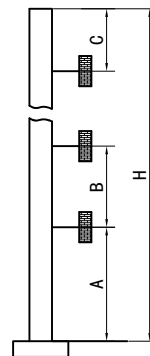



外形尺寸 Outline Dimensions



塔身截面 Masts

附着 Anchorages





















Mast	A	B	C	H
L68B2	48.15m	36.0m	40.5m	333m



● 工作状态支反力 in service Reaction ■ 非工作状态支反力 Out of service Reaction
 ⚠ 不含平衡重及压重塔机独立高度重量 Total weight of free standing crane (exclude Counter weight & ballast)

附着道数: Number of tie collors=(H-A-C)/B+1




载荷特性表 Load Diagrams 12t

R _(m)	Fall	R.C _(max/m)	C _(max/t)	20	25	30	35	40	45	50	55	60	65	70
70m		18.0	12.0	10.68	8.29	6.70	5.57	4.71	4.05	3.52	3.09	2.73	2.42	2.16
		34.5	6.0	6.0	6.0	6.0	5.91	5.05	4.39	3.86	3.43	3.07	2.76	2.50
65m		20.0	12.0	12.0	9.33	7.55	6.28	5.33	4.59	3.99	3.51	3.10	2.76	
		38.1	6.0	6.0	6.0	6.0	6.0	5.67	4.93	4.33	3.85	3.44	3.10	
60m		21.0	12.0	12.0	9.87	8.01	6.68	5.69	4.91	4.29	3.78	3.36		
		40.2	6.0	6.0	6.0	6.0	6.0	6.0	5.25	4.63	4.12	3.70		
55m		22.5	12.0	12.0	10.65	8.64	7.20	6.12	5.28	4.61	4.06			
		42.6	6.0	6.0	6.0	6.0	6.0	6.0	5.62	4.95	4.40			
50m		23.5	12.0	12.0	11.19	9.08	7.57	6.44	5.56	4.86				
		44.4	6.0	6.0	6.0	6.0	6.0	6.0	5.90	5.20				
45m		24.0	12.0	12.0	11.46	9.28	7.73	6.57	5.66					
		45.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0					
40m		23.5	12.0	12.0	11.19	9.04	7.51	6.36						
		40.0	6.0	6.0	6.0	6.0	6.0	6.0						
35m		23.0	12.0	12.0	10.89	8.77	7.26							
		35.0	6.0	6.0	6.0	6.0	6.0							
30m		22.5	12.0	12.0	10.57	8.46								
		30.0	6.0	6.0	6.0	6.0								

机构 Mechanisms 12t

名称							容绳量 m	电机功率 kW
			m/min	t	m/min	t		
起升 Hoisting	12t	45LVF30	0-106	1.50	0-53	3.0	670	45
			0-40	6.0	0-20	12.0		
变幅 Trolleying	BP6555X		0-65 m/min					5.5
回转 Slewing	2RVF7.5		0-0.6 rpm					7.5×2
电源 Power	380V (±10%) /50Hz			45LVF30: 65.5kW				

平衡重 Counter weight

			PHZ3500	PHZ1300	PHZ600
70m	18.13m	22900kG	6	1	1
65m	18.13m	22300kG	6	1	/
60m	18.13m	21000kG	6	/	/
55m	18.13m	21000kG	6	/	/
50m	18.13m	19400kG	5	1	1
45m	18.13m	18100kG	5	/	1
40m	18.13m	17500kG	5	/	/
35m	18.13m	15300kG	4	1	/
30m	18.13m	12400kG	3	1	1